


MENTOR HOSE RAMPS



Each section weighs
6.7kg. Comes in
6 x 600mm sections .

Load tested to 11,500kg per
wheel

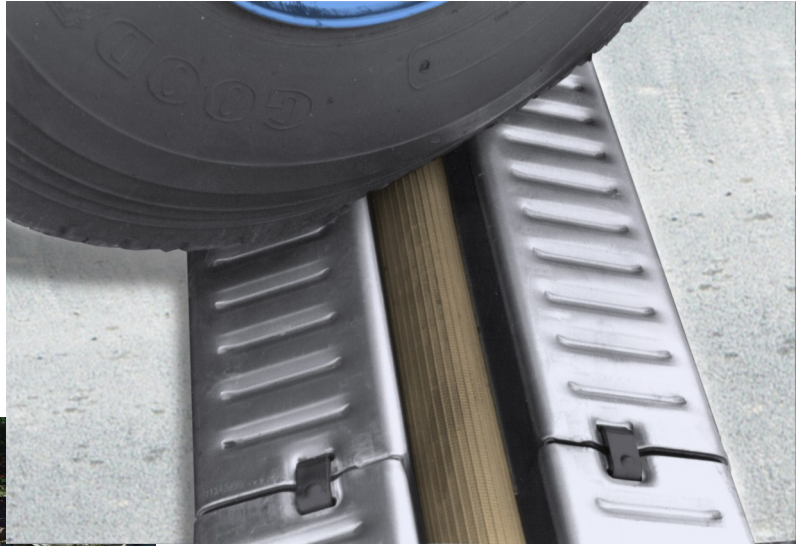

Comes with clips, so no
tools are necessary for
assembly or disassembly

MENTOR HOSE RAMPS

Mentor Hose Ramps are fabricated from 8mm aluminium , and designed to maintain traffic, while protecting a 75mm fire hose


Mentor Hose Ramps are used by Construction Companies, Water and Wastewater Utilities, Sewer Rehabilitation Companies, Horizontal Drilling Companies, Environmental Clean up Companies, Fibre Optic Contractors and Fire Departments .

Product Details

For ultimate reliability, and least ramp movement place Mentor Hose ramps at a 30° angle to the flow of traffic, so vehicles cross the ramp one wheel at a time.

Hose ramp Details

- ♦ Fabricated out of 8mm Aluminium .
- ♦ Sold in 3.600m Increments (6 x 600mm Sections)
- ♦ Constructed to protect a maximum 75mm Fire hose.
- ♦ Clip assembly, means no tools required.
- ♦ Each section weighs 6.7kg



Disclaimer: While every effort has been made to ensure that the information in this brochure is correct and accurate. Users of AWIS Pty Ltd provided product or information within this document must make their own assessment of suitability for their particular application. Product dimensions are nominal only, and should be verified if critical to a particular installation. No warranty is either expressed, implied, or statutory

Distributed by AWIS Pty Ltd



A: PO Box 98(1/15 Stud Rd) Bayswater VIC 3153

P: +61 3 9720 2803

F: +61 3 9729 0121

M: David- 0417 052 443 Terry-0412 854 241

E: david@awis.com.au terry@awis.com.au